

Proof of Concept of Wireless TERS Monitoring

Allen, M, Gaura, E, Wilkins, R, Brusey, J, Dong, Y & Whittle, A

Author post-print (accepted) deposited by Coventry University's Repository

Original citation & hyperlink:

Allen, M, Gaura, E, Wilkins, R, Brusey, J, Dong, Y & Whittle, A 2017, 'Proof of Concept of Wireless TERS Monitoring' Structural Control and Health Monitoring, vol 24, no. 12, e2026
<https://dx.doi.org/10.1002/stc.2026>

ISSN 1545-2255

ESSN 1545-2263

DOI 10.1002/stc.2026

Publisher: Wiley

This is the peer reviewed version of the following article: Allen, M, Gaura, E, Wilkins, R, Brusey, J, Dong, Y & Whittle, A 2017, 'Proof of Concept of Wireless TERS Monitoring' Structural Control and Health Monitoring, vol 24, no. 12, e2026, which is due to be published in final form on Wiley's website. This article may be used for non-commercial purposes in accordance with Wiley Terms and Conditions for Self-Archiving.

Copyright © and Moral Rights are retained by the author(s) and/ or other copyright owners. A copy can be downloaded for personal non-commercial research or study, without prior permission or charge. This item cannot be reproduced or quoted extensively from without first obtaining permission in writing from the copyright holder(s). The content must not be changed in any way or sold commercially in any format or medium without the formal permission of the copyright holders.

This document is the author's post-print version, incorporating any revisions agreed during the peer-review process. Some differences between the published version and this version may remain and you are advised to consult the published version if you wish to cite from it.

Proof of Concept of Wireless TERS Monitoring

Michael Allen¹, Elena Gaura^{1*}, Ross Wilkins¹, James Brusey¹,
Yuepeng Dong³, Andrew J. Whittle²

¹*Cogent Labs, Coventry University, Priory Street, Coventry CV1 5FB, UK*

²*Department of Civil and Environmental Engineering, MIT, Cambridge, MA 02142, USA*

³*Singapore-MIT Alliance for Research and Technology, Singapore 138602*

SUMMARY

Temporary earth retaining structures (TERS) help prevent collapse during construction excavation. To ensure that these structures are operating within design specifications, load forces on supports must be monitored. Current monitoring approaches are expensive, sparse, off-line, and thus difficult to integrate into predictive models. This work aims to show that wirelessly connected battery powered sensors are feasible, practical, and have similar accuracy to existing sensor systems. We present the design and validation of ReStructure, an end-to-end prototype wireless sensor network for collection, communication, and aggregation of strain data. ReStructure was validated through a six months deployment on a real-life excavation site with all but one node producing valid and accurate strain measurements at higher frequency than existing ones. These results and the lessons learnt provide the basis for future widespread wireless TERS monitoring that increase measurement density and integrate closely with predictive models to provide timely alerts of damage or potential failure. Copyright © 0000 John Wiley & Sons, Ltd.

Received...

KEY WORDS: Wireless Sensor Networks; Structural Health Monitoring

1. INTRODUCTION

Underground construction of subway stations and building basements are frequently accomplished through ‘bottom-up’ methods, where the permanent structure is built within an excavation pit that is supported by a Temporary Earth Retaining System (TERS). Typically TERS comprise of perimeter walls that are supported internally by cross-lot bracing struts, or externally by tieback anchors (installed in the adjacent ground). These temporary structures are designed to support the loads exerted by the retained soil mass (including pore water pressures), forces induced by foundations from adjacent buildings, etc. Numerical analyses of soil-structure interactions (usually by finite element methods) are used to predict the performance of the structure including the loads in the structural elements, magnitudes of wall deflections and ground deformations at all stages of the construction process. During construction, TERS systems are monitored to ensure the stability of the works and to control/mitigate impacts of excavation-induced ground movements that can affect adjacent structures and facilities. Field monitoring typically includes measurements of compression forces in the strutting system (via strain gauges

*Correspondence to: Cogent Labs, Coventry University, Priory Street, Coventry CV1 5FB, UK E-mail: e.gaura@coventry.ac.uk

or load cells), deflections of the retaining wall (via inclinometers), surface and subsurface ground movements (optical surveys, inclinometers and extensometers) and pore water pressures (piezometers). Ng [1] and Whittle [2] provide background information about these measurement systems. In current practice, the monitoring data are primarily used to a) compare against the expected values predicted by prior analyses of soil-structure interaction, b) to determine if the design specification has been exceeded and c) trigger static threshold based flags/alarms. The high unit costs for installing these instruments (particularly subsurface sensors) leads to sparse spatial coverage at most construction sites. Furthermore, there is little use of the data to interpret the actual field performance and hence, to update model predictions and thus reduce risks associated with the construction process.

Wireless sensing offers an attractive alternate approach for monitoring structural performance. By reducing the unit cost of sensor installation, wireless sensor networks can increase the spatial and temporal resolution for measuring forces in the bracing system (compared to wired devices).

The goal of this research is to enable robust, reliable wireless collection of strain measurements in an excavation environment and make it available for on-line integration, in real-time, with a user application. The novel aspects of this paper are as follows:

- It demonstrates the feasibility of using Wireless Sensor Networks (WSNs) for TERS. An end-to-end proof-of-concept system (ReStructure) has been developed and deployed on an excavation site (alongside a conventional wired system, where forces were monitored by vibrating wire strain gauges, performed by a specialist instrumentation contractor) to acquire, transmit and aggregate strain data. Criteria used for evaluating the suitability of the prototype for the application have been: a) the validity and accuracy of the measurements against the industry gold-standard systems, b) wireless communication reliability and data yield, c) system survivability in field, and d) system and battery life.
- It provides insights into the feasibility of large scale, low cost intelligent WSNs monitoring for TERS through analysis of the data archive created through the pilot deployment. Lessons are drawn from the system design, implementation and deployment that add to the existing body of knowledge on deployable WSNs for structural monitoring.

In this paper, we begin by reviewing related work (Section 2). We then discuss the design specifications for the current application to Temporary Earth Retaining systems (Section 3), and present details of the prototype design and implementation (Section 4). We review data from two field deployments (Section 5) and the lessons learned from this experience (Section 6).

2. RELATED WORK

A number of works in the literature have inspired and guided this project, as well as providing baseline expectations for the deployments. Specifically, we looked at related applications of WSNs (platforms, packaging, and radio connectivity) for monitoring structural health.

Previous research into monitoring of civil structures has attempted to: integrate experimental and numerical modelling of seismic damage in a three storey building (lab scale model) [3]; track performance of excavations during construction [4]; devise new sensing modalities applicable to structural health monitoring [5]; and assess the potential WSNs have for this field [6, 7]. While several recent works discuss aspects of WSN design for structural monitoring [8, 9, 10], there have been few *long-term* (i.e., running over several years) research projects related to the development and deployment of low-power wireless

Table I. Projects surveyed

Institution/Department	Project	Duration
The University of Illinois at Urbana Champaign (UIUC)	Illinois Structural Health Monitoring Project (ISHMP)	2002–
The University of Michigan (U of M)	Yeondae Bridge, Grove Street Bridge, Guendam Bridge	2004/5
The University of California Berkeley (UCB)	Structural Health Monitoring of the Golden Gate Bridge	2004–2006
Cambridge University and Imperial College London	Smart Infrastructure: Monitoring and Assessment of Civil Engineering Infrastructure	2006–2009
University of Pavia, Italy	Pedestrian Bridge, Trasaghis, Italy	2012–2013
Swiss Federal Laboratories for Materials Testing and Research	Railway bridge monitoring	2014–

sensor network systems on bridges and tunnels. Table I shows a breakdown of notable projects surveyed.

- In 2004/5, Lynch *et al.* [11] performed two deployments (2 days each) of a network of 14 custom sensor nodes (distance between nodes of 5.75–19 m, over 46 m), measuring acceleration/vibration for a concrete box girder bridge in Guemdang, Korea.
- In 2006, a UCB team carried out a deployment of a 64-node multi-hop network of MicaZ nodes (2.4 GHz) on the Golden Gate Bridge, sampling vibration/acceleration at 1 kHz (July 2006 to October 2006, with batteries changed in September 2006) [12]. Nodes were spaced 46 m apart (close to the limit of communication). The authors report average radio reception ranges around 30 m with a bi-directional antenna, decreasing to around 15 m in the presence of obstructions. The work informed our design choices particularly as the nodes placement was similar and provided expectation for transmission ranges in the excavation environment.
- As part of the EPSRC WINES project, Cambridge University has had several successful Structural Health Monitoring (SHM) deployments, including a 12-node WSN installed on the Humber Bridge (approx. 60 m distance from sink to furthest node), a 7-Node deployment on a concrete road bridge (approx. 30 m) and a 26-node node deployment on the Jubilee line on the London Underground (approx. 180 m coverage). A key finding is the need for connectivity testing prior to deployment and further routing algorithms design that ensure fast convergence to speed up deployment [13].
- As part of the Illinois Structural Health Monitoring Project [14], the Jindo Bridge in South Korea has had extended deployment of sensors—70 in 2009, increased to 113 in 2011. Wind speed, acceleration and strain, were measured across a heterogeneous network. Multiple aspects of this deployment have been documented: Jang *et al.* [15] describe the hardware and physical deployment including details of the 4 networks (3 single hop networks of 23 nodes covering 175 m, and 1 multi-hop network) and emphasise that antenna placement is key to increased transmission ranges, while Nagayama *et al.* [16] evaluated the use of multi-channel transmission to increase the available throughput of the network in high data rate applications.

- Casciati *et al.* [17, 18, 19, 20] developed a generic wireless data acquisition system for structural health monitoring and applied it to monitoring low frequency vibration of a timber pedestrian bridge in Italy over 2 separate days of experiments. Key findings were that: measurements were validated against wired sensors; ACKs were required to avoid data loss; and various measures including adapting transmit power could be used to reduce power consumption.
- In 2014, Feltrin *et al.* [21] developed and deployed a custom sensor node for railway bridges to predict fatigue from train traffic. Their custom sensor node was based on the TI MSP430 SoC, and a sub-GHz radio. The deployment consisted of 7 nodes deployed for 13 days on a railway bridge in November 2014. Over the 13 days they achieved a PDR > 90% through an event-based system design. Similar to the ReStructure nodes, Feltrin *et al.* [22] note the large power requirement for sensing. They solve this issue by using low power components for their strain gauge signal conditioning hardware.

A variety of platforms were used in these projects. Commonly, wireless sensor nodes were constructed as a combination of a) an off-the-shelf radio / microprocessor platform and b) a custom I/O board to provide the relevant functionality for the motivating application. We also follow this approach in this work. Software modules and operating systems are readily available for existing sensor node platforms (e.g., TinyOS and Contiki), however these platforms rarely provide the specialised on-board signal processing chains that are required for vibration, strain or other structural measurements. From deployments listed, only two developed custom hardware: Lynch [23] developed the Narada hardware platform and Chen and Casciati [18] developed WDAQS (wireless digital acquisition system).

Radios transmitting on the 2.4GHz ISM band (TelosB, MicaZ and Imote) appear to be most common for structural monitoring projects, with the exception of Hao *et al.* [24] who also used Mica2 (433 MHz), and Lynch *et al.* [23] where a custom node with a 900 MHz radio was used. The platform of direct relevance here is the Imote2 based SHM platform [14]. This is a stackable board configuration that modularises the sensor node, data acquisition and signal conditioning to service a variety of applications. The SHM-S board is used to measure strain, and has undergone several stages of development to refine the circuitry and operation. It features built-in resistors to perform shunt calibration (i.e. fake strain values to test input/output range of the acquisition system) and a digitally controlled potentiometer to enable auto-balancing of a strain gauge in response to a system command. This type of functionality is desirable for a well-tested board that has undergone significant development but is over-complicated for a prototype strain circuit.

Radio connectivity and packaging impact the success of all practical deployments and are thus discussed in more detail below.

- In controlled experimentation with the Imote / CC2420 radio, Rice [25] demonstrated that the use of an external, omnidirectional antenna (the Antenna Titanis) had a significant effect in terms of Received Signal Strength in an anechoic chamber when compared to an integrated/on board antenna. Subsequent field tests examining line of sight transmission ranges demonstrated that this antenna was capable of transmitting around 3 times the distance of the on-board chip antenna (300 m compared to 100 m). The authors also found the effect of transmitting through a steel / concrete floor (between floors in a University building at a distance of 6 m) produced only a 10% reduction in reception rate when using the external antenna, compared to line of sight transmission between floors. Due to the improvement in reception rate using the external antenna, the same antenna has been integrated to the ReStructure node. However, we did not perform any comparison tests to assess performance.
- An investigation in 2010 [26] used 20 Narada nodes in an open parking lot to investigate the benefit of i) a custom amplifier on the standard 2.4 GHz radio (10 dB amplification) and ii) directional antennas. With a standard antenna, maximum distance achievable is between 200 m (no amplification) and 300 m (amplification). With the directional antenna, the maximum distance increases to 500 m (no amplification) and 600 m

(amplification). The power amplification has a significant cost to the sensor node power budget and so represents a design decision for specific applications, as does the directional antenna, which limits the configuration of the sensor network. Since, micro-benchmarking showed that the nodes would not meet the one year lifetime requirement, and we could not access the nodes post-deployment, the ReStructure node does not include a signal amplifier. Furthermore, as the deployment site was ever evolving, we settled for an omni-directional antenna.

- In 2008, Hao *et al.* [24] performed a study of radio connectivity during the construction of Pasir Panjang MRT station in Singapore, as part of a project related to an Integrated Dual Radio Framework for sensor networks. This unpublished work examined the difference in radio connectivity between MicaZ (2.4 GHz) and Mica2 (900 MHz) sensor nodes. Unfortunately, the authors only deployed sensors at one side of the excavation, and then only at the top. The nodes performed a simple packet counting exercise, with individual nodes transmitting a burst of packets every 11 minutes while its neighbours counted the number of packets received. The longest period tested was for 5.5 days. The authors found positioning of the antenna is vital for connectivity. When the nodes were simply placed on the struts, the 2.4 GHz radio had slightly better performance (this result was duplicated in the lab with the nodes placed on the floor). However, when the antenna was raised, the opposite was true. In Feltrin's project [21] they used a sub-GHz radio in their custom sensor to achieve better signal propagation as no nodes had line of sight. The ReStructure nodes used a 2.4 GHz, however during range tests we discovered that communication range was a limiting factor. In future work, we aim to compare 2.4 GHz and sub-GHz radios. The choice of the radio frequency will affect the resulting network infrastructure. For example, longer transmission ranges may reduce the number of gateways required.
- A variety of different approaches have been used to attach sensors onto the structure being monitored. In one bridge monitoring project, enclosures and antennas were attached with G-clamps [12]. In the Jindo bridge project [14], magnets were used to connect the sensor nodes to the underside of the bridge along with curved brackets where nodes needed to be attached to support poles. In both projects, plastic enclosures were used.

3. RESTRUCTURE: DESIGN SPECIFICATION AND MODEL INTEGRATION

The goal of ReStructure is to enable collection of strain measurements in an excavation environment and make it available for on-line integration, in real-time, with a user application. Figure 1 presents the system architecture.

3.1. Challenges

The deployment in this environment is particularly challenging, due to:

Climate The site is located in a tropical climate with frequent and severe rainstorms. Temperatures can rise to 35°C and 99% RH above ground, and above 40°C inside the excavation. There are large daily cycles where temperature can change by 24°C and relative humidity by 60%. Temperature and thus thermal expansion affects both the TERS and the strain gauges. In addition, strain gauges are subject to apparent strain, a change in resistance that is not due to a loading change on the strut, but is related to the differences in thermal expansion coefficient between the strain gauge and strut being monitored.

Obstructions Radio channel quality is expected to be low due to the construction environment, which is mainly a combination of metal and concrete materials that can reflect and attenuate radio signals. The construction site itself is very dusty and there

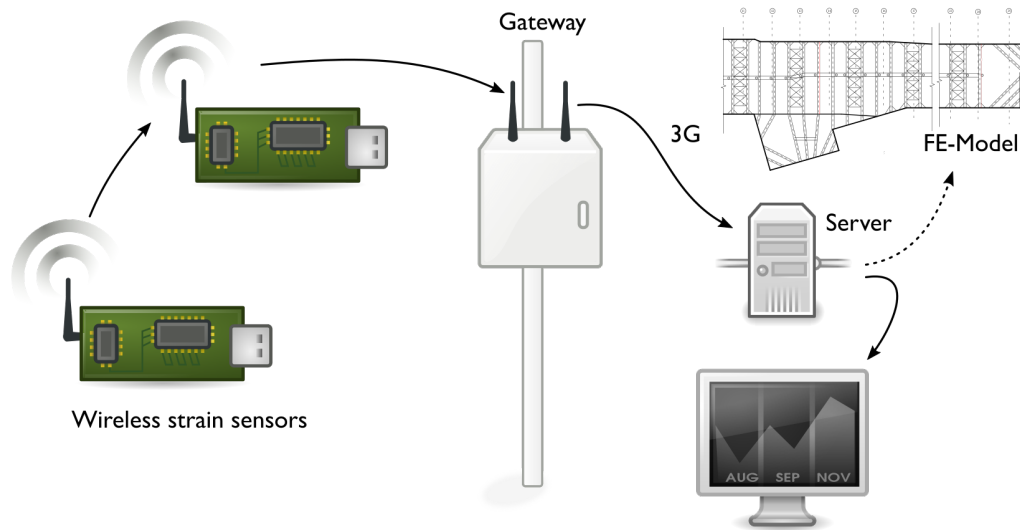


Figure 1. The ReStructure system architecture involves wireless strain sensors transmitting their data locally to a gateway that then forwards via 3G to a server. The server can then be used to display or possibly to integrate with a finite element (FE) model.

is lots of machinery and movement that could damage equipment. This is expected to affect the packet delivery ratio (data yield), and therefore the energy consumption due to retransmissions of messages.

Construction process A construction site is constantly changing: over days and months material is being excavated from the bottom of the trench and new struts and supports are being placed. Therefore, the communication environment can be heavily affected as struts are deployed, providing new surfaces that can reflect and interfere with signals.

3.2. The WSN design specification

Given the above mentioned challenges and the constraints in terms of the expected physical loads (strains), project duration, sampling rate and unit costs of the sensor nodes, the following generic requirements were defined:

Data acquisition and wireless communication The sensor network is expected to collect and transmit data at 5 minute intervals. The nodes are powered via batteries.

Measurement parameters The primary measurand is strain (as a proxy for compressive load in the cross-lot bracing struts). Traditionally, strain is measured using vibrating wire gauges or resistive foil gauges. In commercial structural engineering projects, the standard is to use vibrating wire gauges that are sampled at hourly intervals (or less frequently) and have been shown to provide stable measurements over long-term deployments in harsh environmental conditions. Our two ReStructure deployments described here use resistive foil gauges. These provide a small form factor, have much lower unit costs and simpler field installation (attachment by spot welding) but raise concerns about long term drift in the measurements.. Environmental air temperature and humidity are also measured in the proximity of the strain gauges in order to compensate for environmental effects. The current application uses a single strain gauge for axial compression of the strut (and assumes that bending strains are negligible).

Target lifetime The sensor network is intended to last for the lifetime of an excavation (approximately 1 year). Individual nodes are to be added to the network as the excavation progresses.

Packaging and deployment The strain gauges are mounted directly on the struts. Sensor nodes must be attached close to the foil gauges to reduce lead length and help protect the gauges. It is intended for sensor nodes to be a) low cost to enable dense deployments and b) small in size and robust to prevent them being destroyed or stolen during operation.

There are a number of challenges associated with devising a system that fulfils this set of requirements:

1. maintaining an evolving and growing network in a climatically harsh and dynamic construction environment
2. meeting the system target life in face of environmental obstructions (i.e, where transmission retries penalise the energy consumption)
3. ensuring sufficiently high data yield to enable its use in models and user applications
4. ensuring adequate measurement accuracy with low cost sensing devices

The lack of opportunity to retrieve and debug or otherwise access nodes after installation is an added constraint and one that hindered learning from node failure events.

4. RESTRUCTURE: IMPLEMENTATION AND PROTOTYPE CHARACTERISATION

To reduce risk and development time, the implementation was based on off-the-shelf hardware and software wherever possible. A number of custom hardware interfaces and software components were developed in-house as specified below. The node and gateway energy profiling and the network coverage / yield characterisation performed show the alignment with the design requirements and open areas for further work.

4.1. Sensor node

The sensor node (shown in Figure 2) combines the Zolertia Z1 (MSP430 CPU and a CC2420 radio) platform with a custom strain gauge PCB. The custom PCB supports one bonded foil strain gauge whose readings are acquired using a Wheatstone bridge combined with a low power 16-bit ADC (TI ADS1115). Measurement resolution is $< 1 \mu\epsilon$ with a measurement range of $\pm 2500 \mu\epsilon$. External temperature/humidity monitoring is enabled by a Sensirion SHT15. Each sensor node is packaged in an IP65 aluminium enclosure ($115 \times 65.5 \times 50$ mm, 370 g) with holes for an external radio antenna (4.4 dBi Antenova Titanis), a cable gland for the strain gauge wiring, and a waterproof breathable membrane for the SHT15. Magnetic feet on the enclosures allow the nodes to be placed on the strut without welding. A deployed sensor node is shown in Figure 7.

The node's software was developed using Contiki WSN OS [27], which provides a network stack with a low power MAC (ContikiMAC [28]) and multi-hop tree formation and data collection protocol (Contiki Collect [29]). Custom drivers were written for the strain interface board.

Contiki-Mac is an interval listening approach, which saves energy by turning the radio off most of the time and only listening at periodic intervals. To support this, the transmitter sends its packet repeatedly until the receiver wakes up, hears the packet, and acknowledges receipt.

The Contiki Collect protocol forms a tree structured network with a single node that forms the collection "root". During network formation, each node announces how many hops from it to the root and any nodes receiving such announcements choose the path based on a combination of expected transmission reliability and path length.

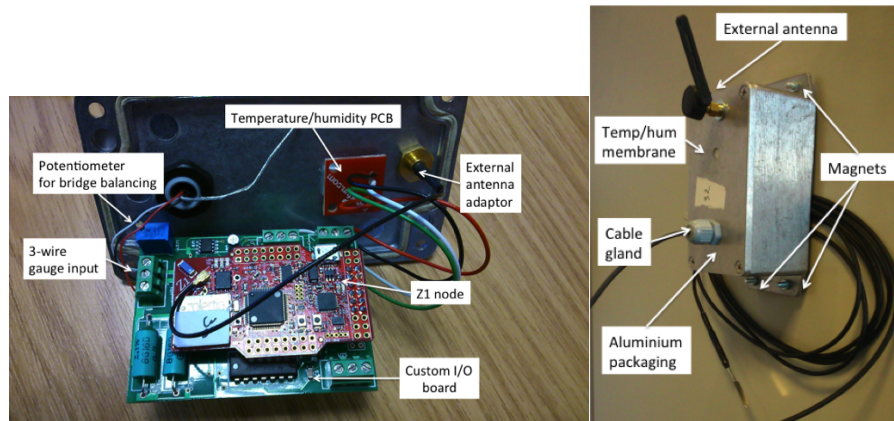


Figure 2. ReStructure wireless sensor node hardware

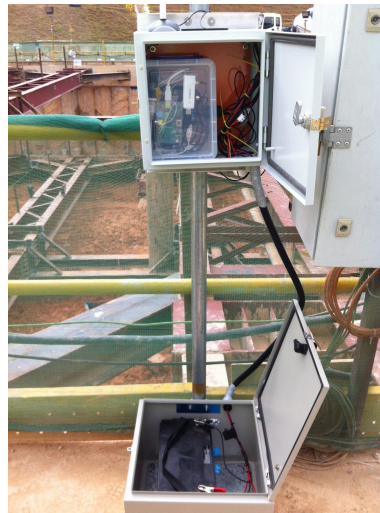


Figure 3. Deployment of server at the construction site, nodes are placed at the second strut level (approx. 12 m away)

At application level, a traditional sense and send system was implemented that acquires, stores to flash, and transmits network information (time, RSSI, beacon interval, sequence number, neighbours) as well as a single strain and temperature/humidity measurement at 5 minute intervals (92 bytes of payload total). Storing samples to flash means that, even if the network fails, all measurements will be recorded while the node has sufficient battery power. Oscilloscope-based energy profiling was used to estimate the lifetime of the sensor nodes given a particular battery capacity and sampling rate [30] (see Section 4.3).

4.2. Gateway

The Gateway was built using a Raspberry Pi model A+ combined with a TelosB node and a USB 3G modem (both with external antennas). The Gateway is deployed inside an IP65 mild steel enclosure and mounted on a pole. Due to deployment constraints, the Gateway was powered by a 12 V 100 Ah battery (Figure 3). During normal operation WSN data is collected by the TelosB, aggregated at the Raspberry Pi and transmitted hourly via 3G to a remote server (and subsequently, compared with the FE model).

Table II. Micro-benchmark estimates for a ReStructure node running sense-and-send. The average current, for all but Idle, excludes the idle current.

Process	Duration (ms)	Average current (mA)	mW
Warm up bridge	5 000	33.6 – 1	1.63
Strain sample	105	33.6 – 1	0.034
Temp/humidity sample	315	33.6 – 1	0.1
Write data to flash	8	6.7 – 1	0.000 46
Send message	30	17.9 – 1	0.005 1
Idle	300 000	1	3
Total			4.8

Based on prior experience with deploying WSNs (see Section 2), the Gateway design and implementation focused on:

- minimising power consumption—by disabling HDMI on the Raspberry Pi and devising custom circuitry to allow the power to the TelosB and 3G modem to be controlled through GPIOs so that it can be turned on only when needed. Our measures reduced the average power requirement of the gateway from over 4.8 W to 1.5 W. Based on gateway micro-benchmarking tests, as described in the next section, we estimate that a 100 Ah battery will provide one month's operation.
- improving fault tolerance between the TelosB and the Raspberry Pi to minimise on-site maintenance—by devising a simple handshake connection so that the Raspberry Pi can periodically check and restart the TelosB if necessary. For 3G transmissions, if an hourly update fails, it is rolled into the following hour's transmissions, and data is always archived locally in case of extended 3G outages.
- ensuring on-site deployment, debugging and maintenance are as easy as possible—the Gateway can host a USB WI-FI dongle. When the dongle is connected, the Gateway becomes a wireless access point (using hostap [31]), hosting a web page that shows real-time updates of data.

4.3. Energy consumption benchmarking

Node Energy Benchmark measurements were conducted for the node operations and used to predict lifetime based on $2 \times$ AA batteries. Power was estimated by measuring the voltage drop over a shunt resistor on the ground line of the power supply. The power consumption for the following operations was determined:

- sense/sample strain only (no warm up time on bridge)
- sense/sample strain and temp/humidity
- sense/sample strain and write data to flash storage
- sense/sample strain and send data over network
- idle (no sampling, listening for packets)

Figure 4 shows a typical power use profile when switching on strain bridge and taking a sample. Each point on the graph is an average of 64 oscilloscope samples. Based on these measurements, we derived Table II, which shows an estimated breakdown of power consumption by operation.

The energy benchmarking results in Table II provide a profile of the design and help to identify opportunities for improvement. For example, wireless operation (sending a message and idling) consumes 3 mW (63%) whereas sensing consumes 1.8 mW (37%). Note that the time taken to sample temperature and humidity is almost three times the time taken to acquire the strain measurements. Since the I/O board controls the temperature/humidity sensor's power, the Wheatstone bridge is also powered during this time. A refinement of the PCB design may add an extra switch to allow the Wheatstone bridge to be powered independently of the temperature/humidity sensor.

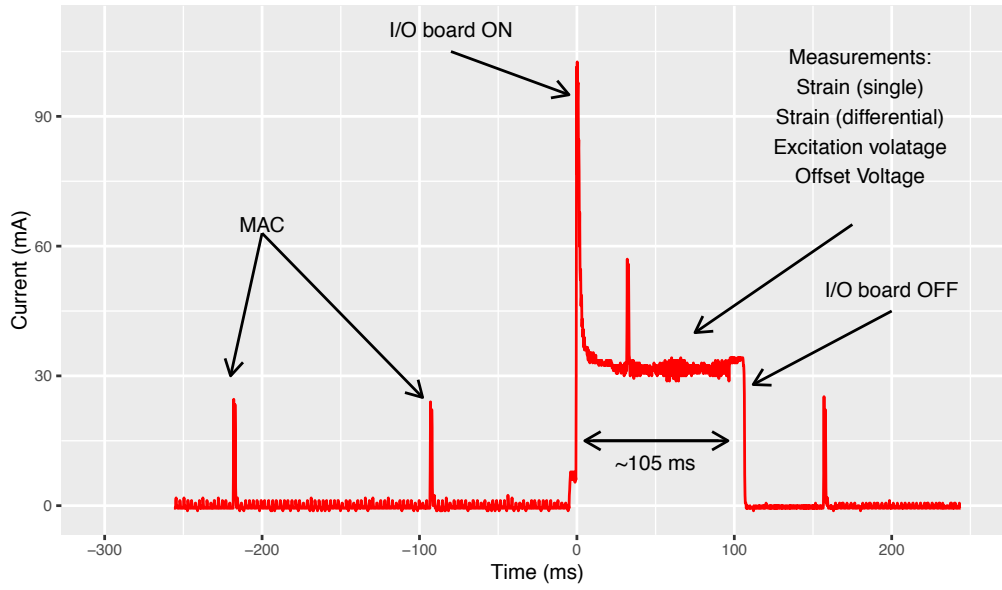


Figure 4. The characteristic current consumption when switching on strain bridge and taking a sample. Note that this profile does not include time spent to ‘warm-up’ the bridge, i.e. ensure that the strain value has reached a stable reading before taking a measurement.

Table III. Micro-benchmark estimates for the ReStructure gateway.

Process	Duration (s)	Average energy (A)	As
3G data transmission	60	0.27	16.2
Plotting	60	0.13	7.8
Processing	3480	0.126	438.48
Total	3600		462.48

The individual operations of a sensing cycle (5 minute interval) were measured and aggregated to determine a simple, best-case baseline for node lifetime of 205 days of operation with $2 \times 7.8 \text{ Ah} \times 1.5 \text{ V}$ C-cells.

Gateway Table III shows an estimated breakdown of power consumption by functionality. Using a 12 V 100 Ah car battery we estimate the gateway life to be 31 days. Future designs should consider making use of solar panels.

4.4. Network performance

The multi-hop network characterisation below provides insights into the performance and yield expected from the ReStructure prototype in a heavy machinery environment (see Figure 5) but without the harsh climatic conditions of the construction site. Over a series of tests, each of the nodes transmitted ‘dummy’ measurement packets at 5 minutes interval.

Table IV provides a summary of the performance of the network over a (roughly) 23 hour test (transmitting about 276 packets). The performance is summarised by two measures, Packet Delivery Ratio (PDR) and Link Stability. PDR is the percentage of packets received vs. expected. We define *link stability* as the proportion of time that nodes are sending beacons at the longest interval (3600s). Collection tree protocols, such as Contiki Collect, broadcast fewer beacon messages when the network is stable [32]. In addition, the number of packets sent directly to the sink node versus other nodes is recorded to identify the proportional use of direct versus multi-hop transmission.

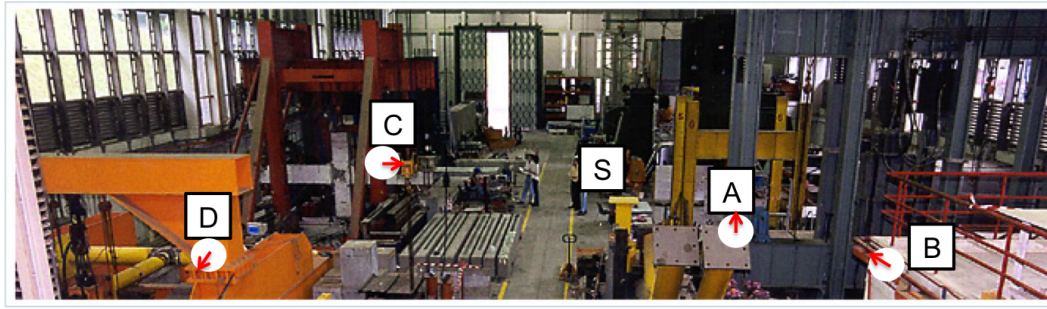


Figure 5. Approximate layout of nodes during network test. Arrows indicate antenna orientation; the sink is located roughly 3m to the left of node A.

Table IV. Summary of network statistics from 1-day multi-hop network deployment.

Node	Duration (h)	PDR (%)	Link stability (%)	Most common parent	MCP (%)
A	22.7	91.5	1.6	Sink	57.8
B	22.8	100.0	94.5	Sink	100.0
C	22.7	89.3	2.1	Sink	70.0
D	22.6	100.0	94.6	Sink	100.0

Over the testing period, we observed two stable network connections, with 100% PDR, that were directly connected to the sink (Nodes B and D), and two unstable network connections (Nodes A and C) that had a lower PDR, were sending through two or more hops, and were changing path frequently. This test indicates that data yield and network stability are related and that if stability is low, data yield will also be low.

5. FIELD DEPLOYMENT

The prototype ReStructure system was deployed to monitor axial strains for a series of selected struts within a large excavation pit. Data was collected between May and December 2015.

Deployment of five nodes at three levels on a single strut line in the excavation took place between 4th May and 18th July 2015. Level 1 deployment took place on 4th May 2015 (2 nodes), level 2 deployment took place on 9th June 2015 (2 nodes) and level 3 deployment took place on 18th Jul 2015 (1 node). Figures 6 and 7 show the deployment environment and an example of a node with a wireless bonded foil (WBF) strain gauge strain gauge deployed next to the measurement contractor's vibrating wire (VW) gauge.

The ReStructure nodes were mounted on to struts after it had been placed in the excavation, but before it had been pre-loaded: installation of the strut is completed by jacking preload forces into the strut to ensure that it remains in compression during subsequent excavation events. This allowed us to calibrate the WBF strain gauge in an unstressed/zero strain configuration. The WBF strain gauges were spot welded aligned to the length of the strut on the web (vertical section of strut, see Figure 7) and the strain bridge was manually balanced by adjusting the on-board potentiometer while the node is



Figure 6. Excavation pit being prepared for the insertion of Level 2 struts.

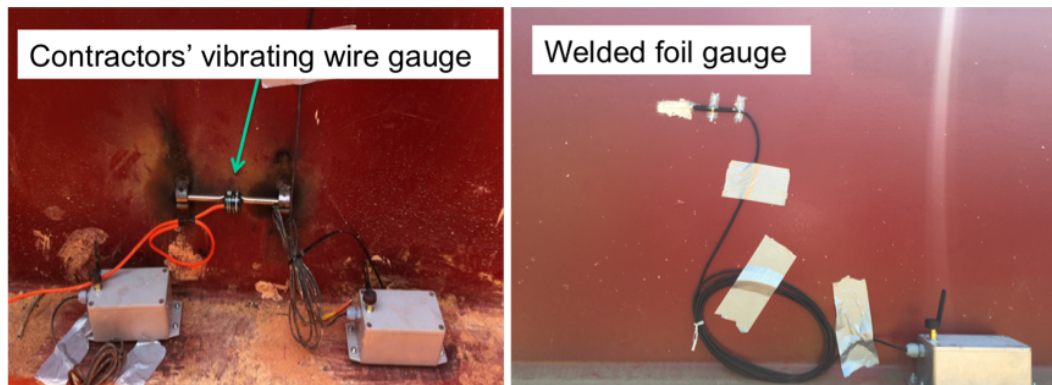


Figure 7. Example deployment on a strut next to vibrating wire gauges

connected to a laptop displaying the current reading. This balancing procedure allows a reference point to be set that corresponds to zero load on the strut.

Figure 8 shows a schematic elevation of the cross section of the struts and the relative distance between the nodes and the gateway. Data was collected at 5 minute intervals, and nodes communicated on 802.15.4 channel 26 in an attempt to avoid any WI-FI interference and the maximum number of retries for each packet (sent by Contiki Collect) was set at 16.

5.1. Network and energy performance

Table V shows the deployment duration and data yield across the deployment. There were two major outages where the node gateway batteries had exhausted: the first outage lasted 2.5 days (22nd to 24th June 2015) and the second outage lasted 19.3 days (10th to 29th September 2015), due to difficulties accessing the site. The data yield (or PDR), ignoring the gateway outages, is shown in the last column in Table V.

Based on the analysis in Section 4.3, it was predicted that each node would have a best-case lifetime on 205 days. We see that both nodes on S2 got to within 10% of this prediction, where as the batteries in nodes on S1 and S3 lasted <50% less than expected. There are two potential explanations for this discrepancy - firstly, the effect of radio retransmissions and packet forwarding on lifetime (not analysed in this work), and secondly choice of battery.

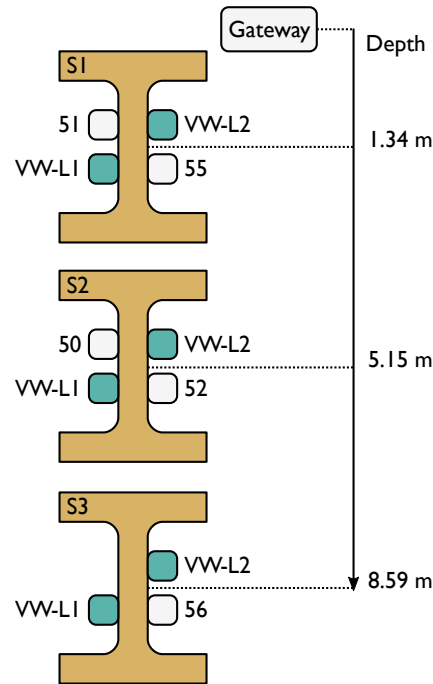


Figure 8. Deployment layout of ReStructure wireless bonded foil (WBF) strain gauges (50–56) and commercial vibrating wire (VW) gauges (VW-L1/L2) across three strut levels (S1, S2, S3). Distance from deployment location to gateway is shown in metres.

Table V. Deployment summary for H14

Strut level	Node ID	Deployed	Offline	Duration (days)	Data yield (%)	Data yield w/o outages (%)
S1	55	4th May	16th Aug	104	86.1%	88.2%
S1	51	4th May	26th Jul	82	91.1%	93.9%
S2	52	9th Jun	15th Dec	189	87.6%	99.0%
S2	50	9th Jun	11th Dec	185	87.4%	99.1%
S3	56	18th Jul	4th Nov	109	81.3%	98.7%

Nodes 50 and 52 were fitted with Energizer MAX Alkaline C cells, while the other nodes were fitted with Duracell PROCELL Alkaline C cells, suggesting that the Energizer batteries performed better for the energy consumption profile outlined in Section 4.3.

The Network configuration for the period 9th June to 4th November 2015, where all nodes were deployed and operating concurrently, is shown in Table VI. The network performance is evaluated using link stability, as defined in Section 4.4, as well as most common parent (MCP). The network was stable throughout ($> 90\%$ stability for each node), and most often at S1 and S2, nodes chose to send directly to the sink. At S3, node 56 chose to send via S2 most often.

Figure 9 shows an annotated graph of the daily PDR. In some cases, packet loss is specific to the node and is probably due to localised wireless interference or shadowing. Most loss, however, is concurrent indicating that the cause is most likely at the gateway.

Table VI. Network configuration from 9th June 2015 to 4th November 2015 (148 days)

Strut level	Node ID	Dist. to sink (m)	Most common parent	MCP %	Stability
S1	55	1.34	Sink	98.4%	97.2%
S1	51	1.34	Sink	73.3%	92.7%
S2	52	5.15	Sink	86.7%	95.6%
S2	50	5.15	Sink	81.0%	93.9%
S3	56	8.59	50	64.6%	90.0%

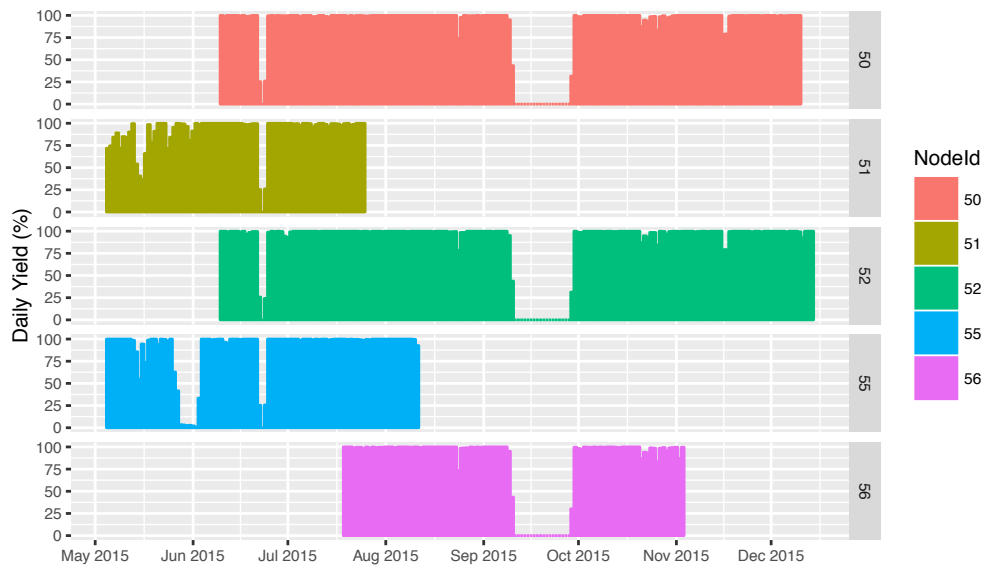


Figure 9. Daily PDR for Deployment 2 showing some independent yield loss (e.g., late May for node 55) and some concurrent loss (e.g., September for nodes 50, 52, 56). Concurrent losses are most likely due to gateway failure.

5.2. Strain measurement results

Wireless bonded foil (WBF) strain data was collected by the ReStructure nodes at 5 minute intervals and vibrating wire gauge (VW) strain data was collected by contractors at roughly hourly intervals.

Figure 10 compares the VW strain measurements with the WBF strain gauge. The VW measurements are compensated for temperature and hence, aim to measure only the loads from the earth pressures. The VW data contain significant noise, skewed in the negative direction, possibly associated with electromagnetic interference and which is reduced in the figure by using a median filter ($k = 5$).

The WBF measurements could not be compensated using a factory polynomial as none was provided by the manufacturer. Therefore, we used part of the data to compensate under the assumption that temperature is the main cause of diurnal variation. To derive a thermal compensation curve for the WBF measurements, we used a LOESS fit to establish the overall trend for strain, where the temperature was 27 ± 0.1 °C, and then found the residual strain (for all temperatures) against this fit. This residual is then mapped to temperature as shown in Figure 11 to derive a temperature compensation curve. Note that the effect on residual strain is larger (more negative) for the same temperature when the temperature is increasing (during the morning) than when the temperature is decreasing (during the evening). Compensating for temperature does not completely remove the diurnal variation

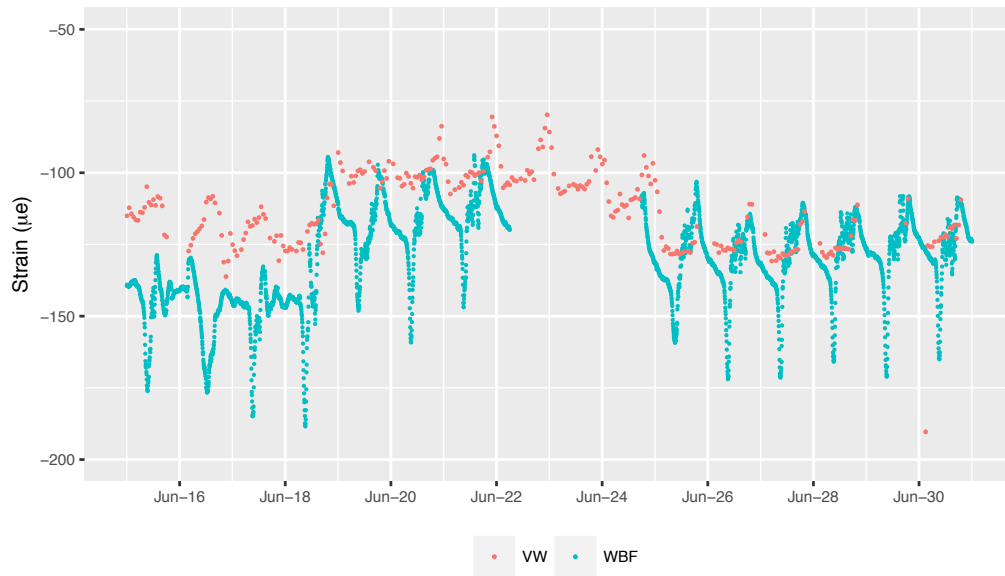


Figure 10. Comparison of vibrating wire (VW) and wireless bonded foil (WBF) strain measurements at S1-L1

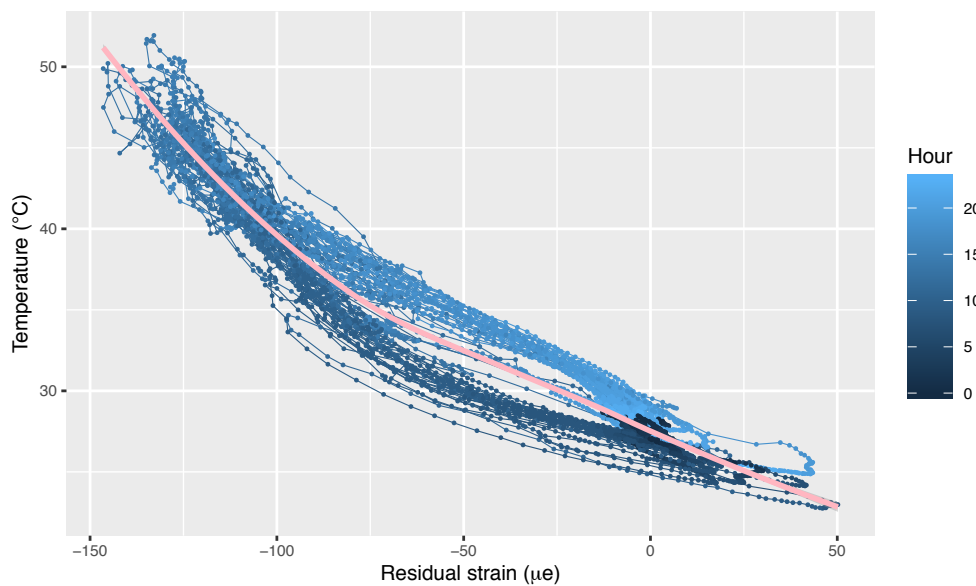


Figure 11. Residual strain versus temperature providing thermal compensation curve for S1-L1 node 51 along with a LOESS fit that was used to derive the compensated measurement shown in Figure 10.

and there may be other factors (e.g., temperature at other locations or rate of change of temperature) that explain this variation.

To allow comparison of the VW and WBF in terms of long-term trend, we examined the daily median strain over time, as shown in Figure 12. As shown in Table VII, most WBF sensors, with the exception of S1-L2 (Node 55), correlated well with the VW sensor at the same site. Although it is not clear what the cause of failure was, node 55 may have been

Table VII. Pearson correlation and mean difference (offset) for daily median strain of VW versus WBF over different sites

Site	Node	Correlation	Offset $\mu\epsilon$
S1-L1	51	0.89	-26 ± 3
S1-L2	55	0.19	81 ± 10
S2-L1	50	0.83	83 ± 2
S2-L2	52	0.91	26 ± 1
S3-L2	56	0.93	98 ± 4

affected by poor bonding of the foil to the strut. In the other WBF sensors, there is no drift in readings apparent. Correlated WBF sensors are offset from the corresponding VW sensors and this offset is probably due to differences in calibration procedures between the two. Specifically, WBF sensors were zeroed prior to preloading whereas VW sensors were zeroed during preloading. Between stages, it is clear that the preloading phases for S2 and S3 had an effect on the strain measurement for the struts above them.

Figure 13 shows a comparison of load-cell (LC) measurements with VW and WBF strain measurements that have been converted to force based on the strut's dimensions and elastic modulus. As with the VW measurements, LC measurements are taken hourly. The graph provides a daily median summary to smooth the diurnal variation and show the trend. VW-S3-R1 is offset negatively whereas there is a positive offset for WBF-S3-L2. The load cell LC-S3 corresponds well to the other VW measurements, although there is some fluctuation that does not correspond. Specifically, on the 28th August and 9th September, the LC recorded large negative spikes that are not reflected in the VW or WBF measurements. These appear to be due to measurement noise for the LC sensor. Towards the end of the period, the WBF measurement has a positive drift not occurring in the VW measurements.

6. LESSONS FROM THE DEPLOYMENTS AND OPEN CHALLENGES

The ReStructure deployments and the subsequent data analysis revealed a number of open questions for the WSN community as well as providing several insights into more practical aspects of the implementation and deployment that can increase the success of future projects if catered for.

6.1. Practical insights

Sensor node calibration The current sensor node requires manual calibration on site, where environmental conditions can be extreme. Setting up and calibrating nodes in situ also requires a wired connection to the node. A wireless auto-calibration procedure (prompted remotely by the deployer of the network) for nodes once they have been installed could make the process faster and easier. Alternatively, calibration might be skipped and offsets applied during data processing.

Sensor node communication The current sensor network communication technology uses 802.15.4 compatible radios transmitting at 2.4 GHz. It is possible that using a sub-1GHz frequency would increase the range and stability of the multi-hop low power network. A platform such as the Zolertia Remote[†] provides both 2.4 GHz and sub-1 GHz radios, which could enable side-by-side tests. Unfortunately, in the current deployment we have been unable to perform a thorough analysis of the network operations for dual-band radios. ReStructure performed well when deployed over three

[†]<http://zolertia.io/product/hardware/re-mote>

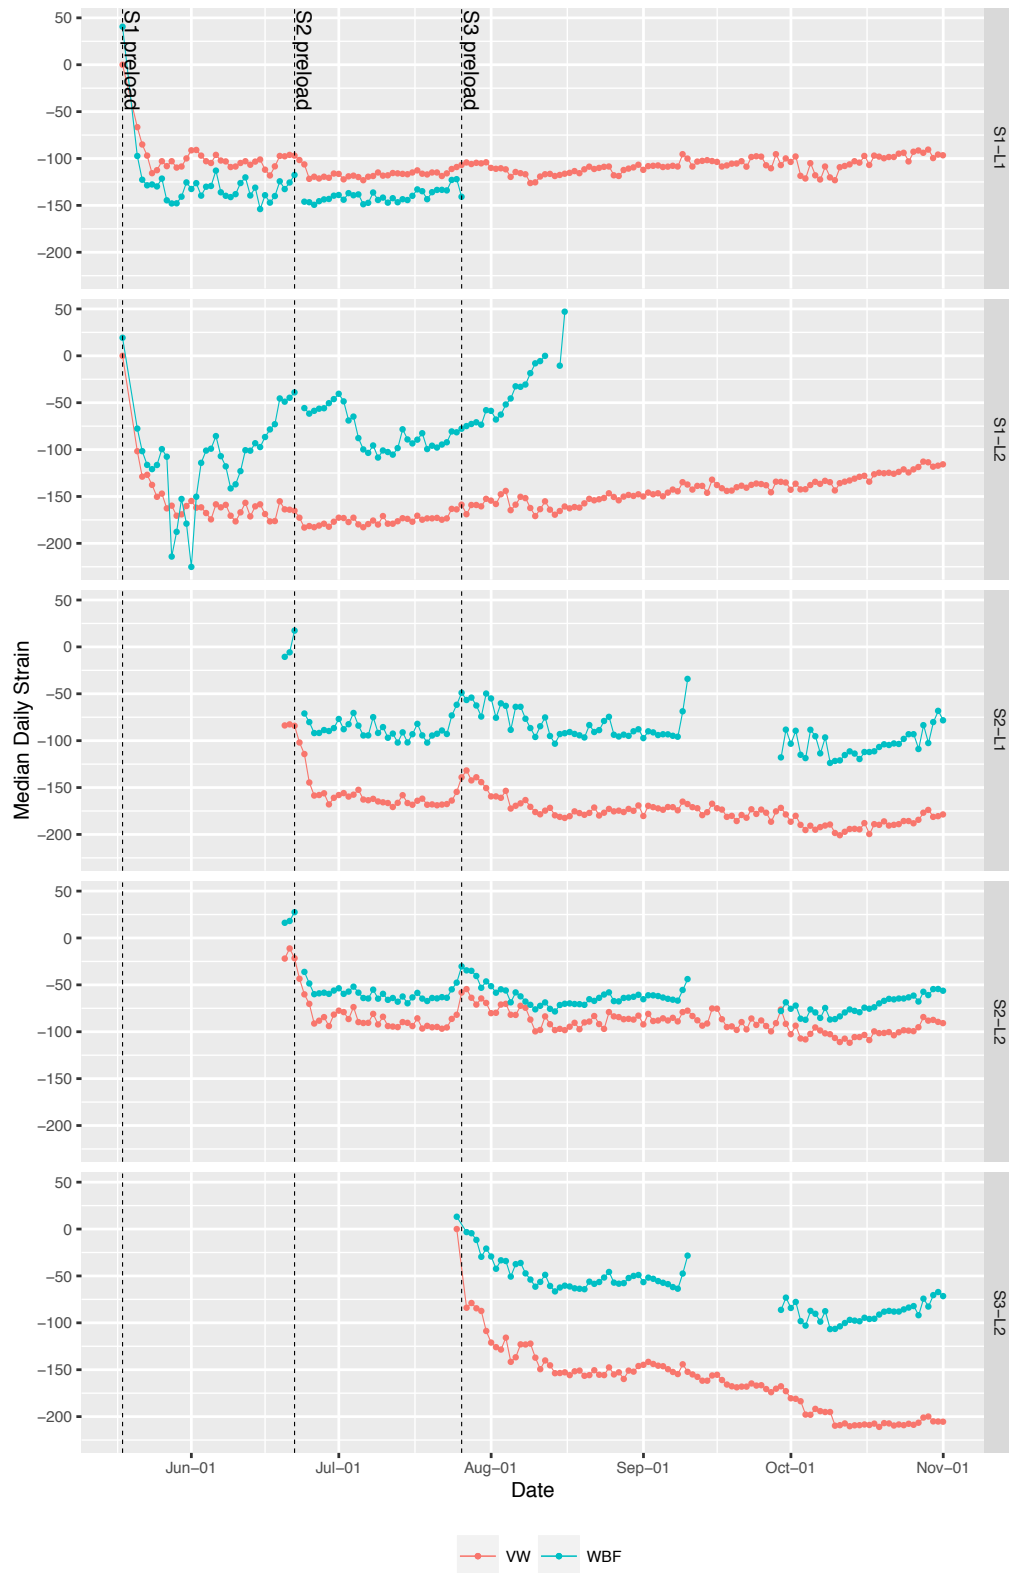


Figure 12. Daily median strain comparing WBF with VW

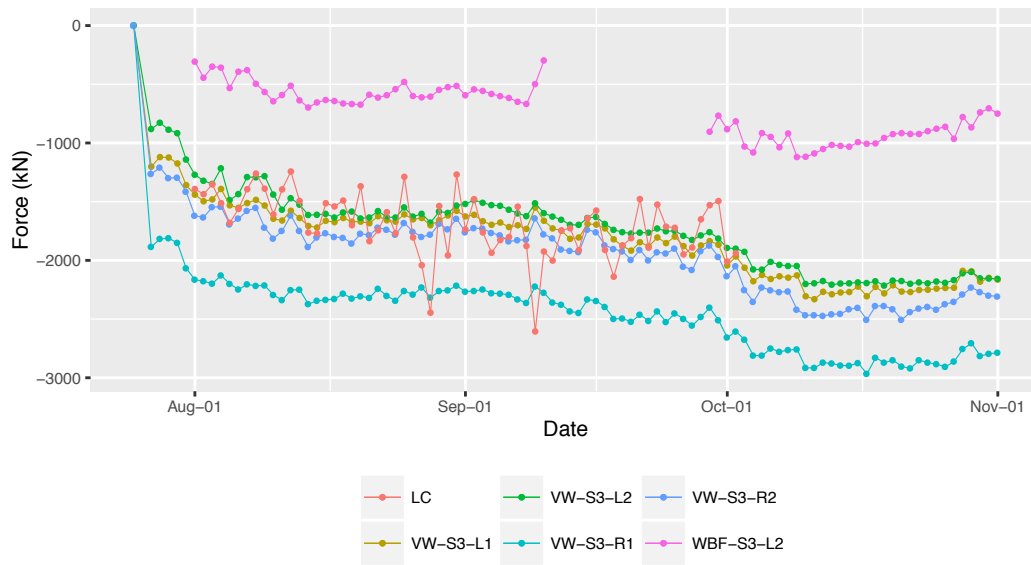


Figure 13. Comparison of the daily median force for the S3 load cell (LC) with two strain gauge types (VW and WBF). VW measurements are for all four sites (L1, L2, R1, R2) whereas WBF is for L2 only.

strut levels, however the distance is only tens of metres. Intuitively, short transmission distance is not an issue in a sufficiently dense network (e.g., two nodes per strut). However, we did not deploy enough sensors to see how the network scales.

Sensor node packaging The current sensor node is rated to IP65. We had however encountered instances of water ingress and one node had water damage during severe rainstorms. Improving the IP rating to IP67 or IP68 will ensure robustness.

Gateway The current gateway design makes use of batteries that must be replaced every 30 days. A better design would be to connect to a mains supply or add a solar panel to extend battery life. Also, the addition of a sensor to measure and transmit battery charge level would have allowed better scheduling of maintenance visits.

6.2. Open design challenges

More reliable, lower maintenance networks would be necessary to meet performance requirements for accurate on line modelling and prediction of load in TERS. Methods for identifying the optimal sampling rate, data transmission frequency and assessing connectivity changes can help meet this aim (possibly thorough analysis of network activity on various sites and evaluating the effects of evolving excavations). Observations of network behaviour at scale is also necessary to inform future developments. Open questions are to do with a) the number of gateways needed for best performance, b) adding in redundancy, c) controlling the nodes and d) implementing more dynamic operation of the network at run-time so that data may be acquired at higher rates when events of interest occur, such as strut pre-loading or excavation.

Lower energy networks are needed to meet the longevity requirements—the ReStructure energy benchmarking section showed that 37% of a nodes energy requirement is for sensing and 63% is for Contiki Collect operation (i.e. sending/forwarding packets and idling). To reduce the energy requirement of a node we would need to a) use lower power circuitry for the strain gauge signal conditioning hardware, b) use a (potentially) lower power

network protocol, such as TDMA (Time division multiple access), to reduce the energy cost associated with listening, and c) reduce the energy cost for other sensing.

Methods for detecting and compensating for thermal loading are needed in order to make strain gauges a viable solution for cheap and dense strain measurement.

7. CONCLUSIONS

The paper demonstrates that WSN based systems can be effectively used for monitoring load in TERS during excavation and construction processes. Through the design, implementation and deployments reported, we showed that, when well specified at design stage, WSNs:

- can operate, as required, in the field, unattended, and deliver data to a remote user application;
- can achieve consistently high data yield (observed between 81.3% to 91.1% in normal operating conditions) on single and multi-hop configurations, using 2.4 GHz radio, on active and dynamic construction sites, under extreme climatic conditions and in face of obstructions and interference common to excavation sites. Human error caused the greatest proportion of data loss;
- can evolve their network structure as the number of nodes increases while construction proceeds and depth of excavation increases;
- can be designed to function, on 2×7800 mAh C cells, for a duration of 6 months in sense-and-send mode, with 5 minute sampling interval.

Further research is however needed in order for such systems to achieve their full, large scale industrial potential:

- Solutions must be found to better compensate for apparent strain in the measurement system without removing the effects of thermal loading. Ideally this would be done through in-field calibration under no-load conditions (before pre-loading) or using manufacturer provided polynomial coefficients based on batch testing during production;
- to enable future systems to minimise their power consumption and extend battery life, they will need network protocol and hardware optimisation as well as strategies for adaptive sampling;
- future systems must be easily deployable and self-calibrating to minimise deployment time in extreme deployment environments;
- understanding the impact on wireless communication and data collection capability of a full-scale deployment on a TERS, grown throughout the entirety of its life-cycle (a year or more);
- real-time integration of strain data with structural soil models also remains an open area of research that is worthy of consideration by the community—deriving tight requirements for the WSN from the model side and piloting full end-to-end systems is key to ensure full benefit is obtained from the WSN technologies

The aim of our work is to enable low-power, wirelessly connected strain measurement systems that are sufficiently long-lived to be an integral part of both construction and through-life management of civil structures. Key to future work is to move from providing raw measurements to allowing on-line integration with modelling systems that can lend meaning to that data.

References

1. Ng C, Hong Y, Liu B, Liu T. Ground deformations and soil-structure interaction of a multi-propped excavation in shanghai soft clays. *Géotechnique* 2012; **62**(10):907–921, doi:10.1680/geot.10.P.072.

2. Whittle AJ, Corral G, Jen LC, Rawnsley RP. Prediction and performance of deep excavations for courthouse station, boston. *Journal of Geotechnical and Geoenvironmental Engineering* 2014; doi:10.1061/(ASCE)GT.1943-5606.0001246. URL [http://dx.doi.org/10.1061/\(ASCE\)GT.1943-5606.0001246](http://dx.doi.org/10.1061/(ASCE)GT.1943-5606.0001246).
3. Isidori D, Concettoni E, Cristalli C, Soria L, Lenci S. Proof of concept of the structural health monitoring of framed structures by a novel combined experimental and theoretical approach. *Structural Control and Health Monitoring* 2016; **23**(5):802–824, doi:10.1002/stc.1811. URL <http://dx.doi.org/10.1002/stc.1811>.
4. McLandrich S, Hashash Y, O'Riordan N. Networked geotechnical near real-time monitoring for large urban excavation using multiple wireless sensors. *International Conference on Case Histories in Geotechnical Engineering* 2013; doi:10.1002/stc.1811. URL <http://scholarsmine.mst.edu/icchge/7icchge/session01/31/>.
5. Annamdas VGM, Yang Y. Practical implementation of piezo-impedance sensors in monitoring of excavation support structures. *Structural Control and Health Monitoring* 2012; **19**(2):231–245, doi:10.1002/stc.418. URL <http://dx.doi.org/10.1002/stc.418>.
6. Harms T, Sedigh S, Bastianini F. Structural health monitoring of bridges using wireless sensor networks. *IEEE Instrumentation Measurement Magazine* December 2010; **13**(6):14–18, doi:10.1109/MIM.2010.5669608.
7. Sun Z, Li B, Dyke SJ, Lu C, Linderman L. Benchmark problem in active structural control with wireless sensor network. *Structural Control and Health Monitoring* 2016; **23**(1):20–34, doi:10.1002/stc.1761. URL <http://dx.doi.org/10.1002/stc.1761>.
8. Galbreath J, Townsend C, Mundell S, Hamel M, Esser B, Huston D, Arms S. Civil structure strain monitoring with power-efficient, high-speed wireless sensor networks. In *proceedings 4th International Workshop on Structural Health Monitoring* 2003; .
9. Li J, Mechtov KA, Kim RE, Spencer BF. Efficient time synchronization for structural health monitoring using wireless smart sensor networks. *Structural Control and Health Monitoring* 2016; **23**(3):470–486, doi:10.1002/stc.1782. URL <http://dx.doi.org/10.1002/stc.1782>.
10. Zhou GD, Yi TH, Zhang H, Li HN. Energy-aware wireless sensor placement in structural health monitoring using hybrid discrete firefly algorithm. *Structural Control and Health Monitoring* 2015; **22**(4):648–666, doi:10.1002/stc.1707. URL <http://dx.doi.org/10.1002/stc.1707>.
11. Lynch JP, Loh KJ. A summary review of wireless sensors and sensor networks for structural health monitoring. *The Shock and Vibration Digest* 2006; **38**(2):91–128, doi:10.1177/0583102406061499.
12. Kim S, Pakzad S, Culler D, Demmel J, Fenves G, Glaser S, Turon M. Health monitoring of civil infrastructures using wireless sensor networks. *2007 6th International Symposium on Information Processing in Sensor Networks*; 254–263, doi:10.1109/IPSIN.2007.4379685. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4379685>.
13. Stajano F, Houlton N, Wassell I, Bennett P, Engineering C. Smart bridges, smart tunnels: Transforming wireless sensor networks from research prototypes into robust engineering infrastructure 2009; **0100**.
14. Rice JA, Mechtov K, Sim SH, Nagayama T, Jang S, Kim R, Spencer Jr BF, Agha G, Fujino Y. Flexible smart sensor framework for autonomous structural health monitoring. *Smart structures and Systems* 2010; **6**(5-6):423–438.
15. Jang S, Jo H, Cho S, Mechtov K, Rice JA, Sim S, Jung H, Yun CB, Spencer Jr BF, A G. Structural health monitoring of a cable-stayed bridge using smart sensor technology: deployment and evaluation. *Smart Structures and Systems* 2010; **6**(5-6):439–459.
16. Nagayama T, Moizadeh P, Mechtov K, Ushita M, Makihata N, Leiri M, Agha G, Spencer Jr BF, Fujino Y, Seo JW. Reliable multi-hop communication for structural health monitoring. *Smart Structures and Systems* 2010; **6**(5-6):481–504.
17. Casciati S, Faravelli L, Bortoluzzi D. Pedestrian timber bridges : Experimental investigation and modelling. *Key Engineering Materials* 2013; **569-570**:319–326, doi:10.4028/www.scientific.net/KEM.569-570.319.
18. Chen Zc, Casciati F. A low-noise, real-time, wireless data acquisition system for structural monitoring applications. *Structural Control and Health Monitoring* 2014; **21**:1118–1136, doi:10.1002/stc. URL <http://dx.doi.org/10.1002/stc.1636>.
19. Chen Zc, Casciati S, Faravelli L. In-situ validation of a wireless data acquisition system by monitoring a pedestrian bridge. *Advances in Structural Engineering* 2015; **18**(1):97–107, doi:10.1260/1369-4332.18.1.97.
20. Chen Z. Energy efficiency strategy for a general real-time wireless sensor platform. *Smart Structures and Systems* 2014; **14**(4):617–641, doi:10.12989/sss.2014.14.4.617. URL <http://koreascience.or.kr/journal/view.jsp?kj=KJKHFZ&py=2014&vnc=v14n4&sp=617>.
21. Feltrin G, Popovic N, Flouri K, Pietrzak P. A wireless sensor network with enhanced power efficiency and embedded strain cycle identification for fatigue monitoring of railway bridges. *Journal of Sensors* 2016; doi:10.1155/2016/4359415.
22. Feltrin G, Popovic N. Monitoring of strain cycles on a railway bridge with a wireless sensor network. *IABSE Symposium Report* 2015-09-23T00:00:00; **105**(21):1–8, doi:10.2749/222137815818358628. URL <http://www.ingentaconnect.com/content/iabse/report/2015/00000105/00000021/art00004>.
23. Kurata M, Kim J, Lynch JP, van der Linden GW, Sedarat H, Thometz E, Hipley P, Sheng LH. Internet-enabled wireless structural monitoring systems: Development and permanent deployment at the new carquinez suspension bridge. *Journal of Structural Engineering* 2013; **139**(10):1688–1702, doi:10.1061/(ASCE)ST.1943-541X.0000609. URL [http://dx.doi.org/10.1061/\(ASCE\)ST.1943-541X.0000609](http://dx.doi.org/10.1061/(ASCE)ST.1943-541X.0000609).

24. Hao S, Chan MC, Anand B, Ananda AL. Structure health monitoring at mrt construction sites using wireless sensor networks link measurement at pasir panjang station. *Technical Report*.
25. Linderman LE, Rice JA, Barot S, Jr BFS, Bernhard JT. Characterization of wireless smart sensor performance. *Journal of Engineering Mechanics* 2010; **136**(12):1435–1443, doi:10.1061/(ASCE)EM.1943-7889.0000187. URL [http://dx.doi.org/10.1061/\(ASCE\)EM.1943-7889.0000187](http://dx.doi.org/10.1061/(ASCE)EM.1943-7889.0000187).
26. Kim J, Swartz A, Lynch JP, Lee JJ, Lee CG. Rapid-to-deploy reconfigurable wireless structural monitoring systems using extended-range wireless sensors. *Smart Structures and Systems* 2010; **6**(5-6):505–524.
27. Dunkels A, Gronvall B, Voigt T. Contiki - a lightweight and flexible operating system for tiny networked sensors. *29th Annual IEEE International Conference on Local Computer Networks*, 2004; 455–462, doi: 10.1109/LCN.2004.38.
28. Dunkels A. The contikimac radio duty cycling protocol. *Technical Report T2011:13*, Swedish Institute of Computer Science Dec 2011. URL <http://dunkels.com/adam/dunkels11contikimac.pdf>.
29. Dunkels A, Österlind F, He Z. An adaptive communication architecture for wireless sensor networks. *Proceedings of the 5th International Conference on Embedded Networked Sensor Systems*, SenSys '07, ACM: New York, NY, USA, 2007; 335–349, doi:10.1145/1322263.1322295. URL <http://doi.acm.org/10.1145/1322263.1322295>.
30. Brusey J, Kemp J, Gaura E, Wilkins R, Allen M. Energy profiling in practical sensor networks: Identifying hidden consumers. *IEEE Sensors Journal* 2016; **PP**(99), doi:10.1109/JSEN.2016.2570420.
31. Wikipedia. Hostap — wikipedia, the free encyclopedia 2012. URL <https://en.wikipedia.org/w/index.php?title=HostAP&oldid=514630224>, [Online; accessed 8-July-2016].
32. Gnawali O, Fonseca R, Jamieson K, Moss D, Levis P. Collection tree protocol. *Proceedings of the 7th ACM Conference on Embedded Networked Sensor Systems*, SenSys '09, ACM: New York, NY, USA, 2009; 1–14, doi:10.1145/1644038.1644040. URL <http://doi.acm.org/10.1145/1644038.1644040>.